

SOLID Framed Glass / Glass

60 Cell



Self-cleaning
effect




Salt mist
resistance




Fire class A



Dust & Sand
resistance



Ammonia
resistance

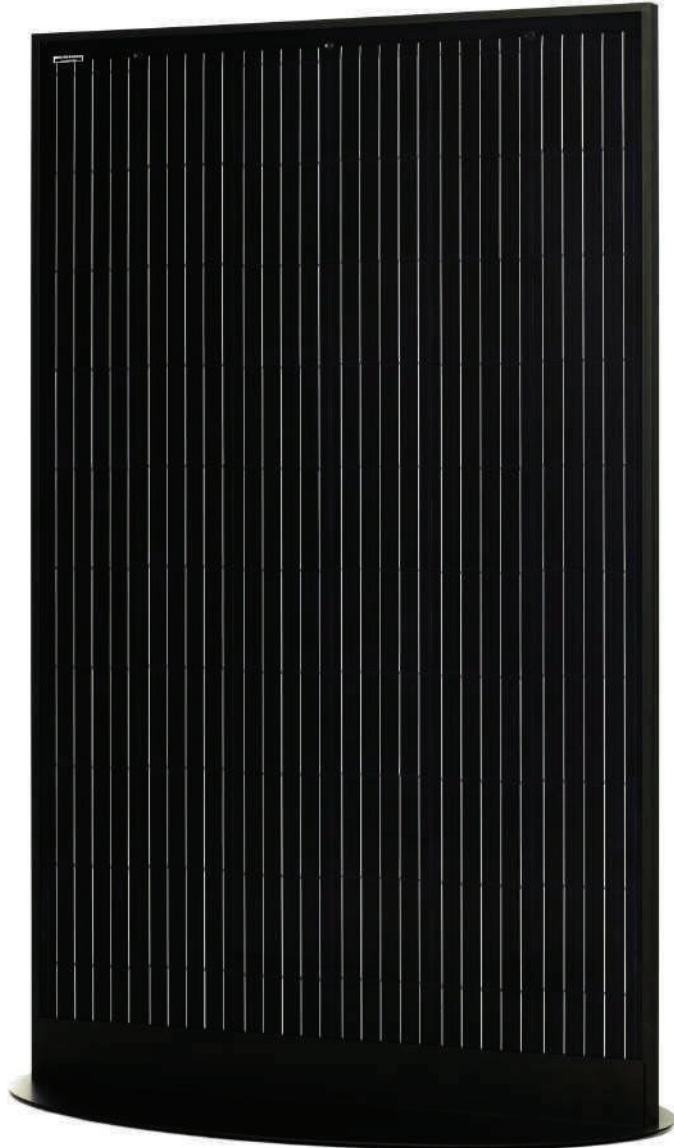

Positive sorting up to +5W

SOLITEK

Mokslininku str. 6A,
Vilnius 08412, Lithuania
Tel. +370 5 263 8774
info@solitek.eu
www.solitek.eu

G052020-1

Mono ⚡ 330W

30

Product
warranty

87%

Power
guarantee


30

Efficiency
guarantee

Electrical data (STC*)	
Maximum Power	330
Cell Technology	Mono
Open circuit voltage (V_{oc}/V)	41,58
Short circuit Current (I_{sc}/A)	10,08
Max Power Voltage (V_{mpp}/V)	33,43
Max Power Current (I_{mpp}/A)	9,88
Module Efficiency (η)	19,13%
Max System Voltage (V)	1500
Max Current (A)	15
Power Tolerance	0/+5W

*Under Standart Test Conditions (STC) of irradiance of 1000W/sq. m., spectrum AM 1.5 and cell temperature of 25 C

Dimensions & Mounting

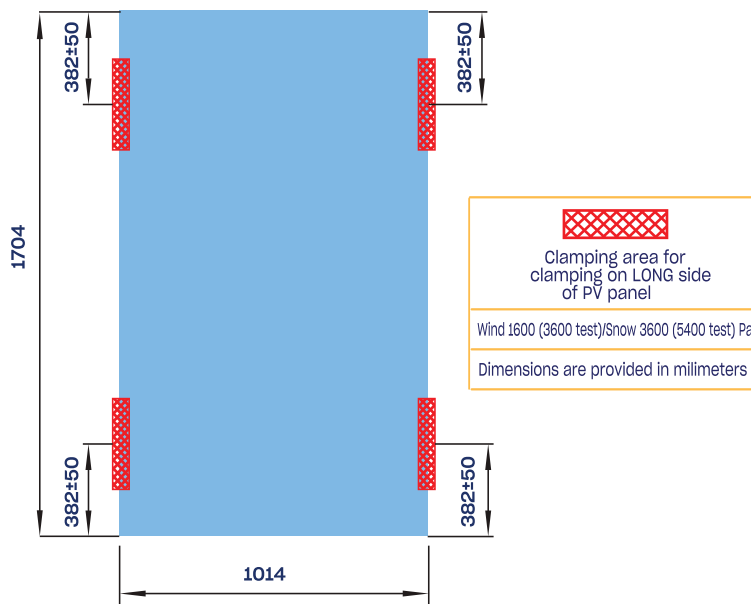

Temperature ratings	Monocrystalline
Current temperature coefficient (α)	+0,04% /° C
Voltage temperature coefficient (β)	-0,35% /° C
Power temperature coefficient (δ)	-0,47% /° C
Nominal Operating Module Temperature	46° C

Mechanical data	
Dimensions (LxWxH) (mm)	1704x1014x35
Weight (kg)	22
Front / Back glass (mm)	2
Cell Type	Mono
Cell Size (mm)	158,75x158,75
Busbars	5
Frame	Black anodized aluminium frame
Operating Temperature (°C)	-40 ÷ +85
Max Load (wind/snow) (Pa)	1600/5330**
Junction Box / IP Class	Split junction box / IP68
Cable Cross Section Size (mm ²)	4
Cable length	1,2 m
Bypass Diodes	3
Connector	MC4 compatible

**Safety factor 1,5

Attention

- Always check if your system is compatible with local environmental conditions (wind/snow load, temperatures) on your site to ensure safety and long-term energy production.
- By connecting less than 6 PV panels in one string there is a risk of inverter inability to start.
- Do not connect differently orientated PV panels in the same string / MPPT of the inverter (unless optimizers are used).
- Do not connect strings with an unequal amount of PV panels in one MPPT (unless optimizers are used)
- Use PV panels of same electrical parameters in one string/MPPT (unless optimizers are used).
- Always ensure that your inverter is equipped with DC disconnect. If not it is recommended to install it externally.
- Never let different metals come in contact with each other. Use bi-metallic plates or plastic separators to eliminate galvanic corrosion.
- It is highly recommended to install SPD's in both AC and DC circuits because overvoltages void the warranty for inverters and also panels if they are harmed.
- It is highly recommended to ground PV panels and to install lightning protection in site.

Tips for Better Power Output

- Better module ventilation and shorter connection cables increase electrical energy production.
- Always observe object/mutual shading in site. Shading can drastically cut electrical energy generation output.
- Increase PV panel height from the ground so that more light can travel beneath the module and then reflect.
- The Albedo value increases significantly if modules are installed above white, lightreflecting surfaces.



Certificates and memberships

