


# SOLID Bifacial

108 cell

Frameless\_Glass/Glass\_Full\_Black




Self-cleaning effect




10 500 Pa  
Extreme load resistance




Fire class A



Salt mist resistance



Ammonia resistance



35% of recycled glass content



98% recyclable



39 mm  
Hail resistance class 4



Positive sorting up to +5W

Front side ⚡ 435 W



Deutsches Institut für Bautechnik

DIBt

30 Year product warranty


90% Power warranty

30 Year efficiency warranty


Electrical data (STC*)	
Maximum power (W)	435
Cell technology	N type, TOPCon - bifacial
Open circuit voltage ( $V_{oc}/V$ )	38,92
Short circuit current ( $I_{sc}/A$ )	13,80
Max power voltage ( $V_{mpp}/V$ )	32,96
Max power current ( $I_{mpp}/A$ )	13,20
Module efficiency ( $\eta$ )	22,07%
Max system voltage (V)	1000
Max current (A)	22
Power tolerance	0/+5W

\*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%.

Warranty	
30 years product warranty	
30 years efficiency warranty	
First year degradation (%)	1%
Annual degradation (%)	0,31%
Power in year 30 (%)	90 %

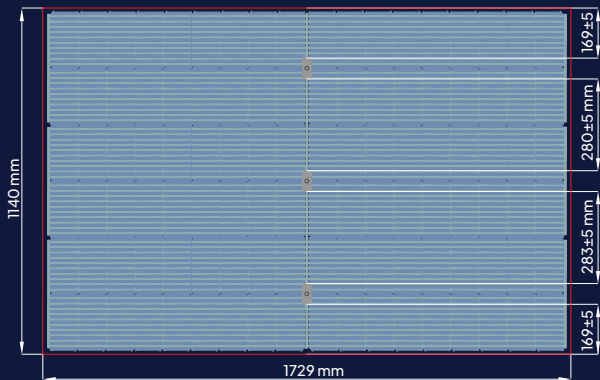

A: Drainage;  
B: Ventilation;  
C: Mounting holes;  
D: Earthing

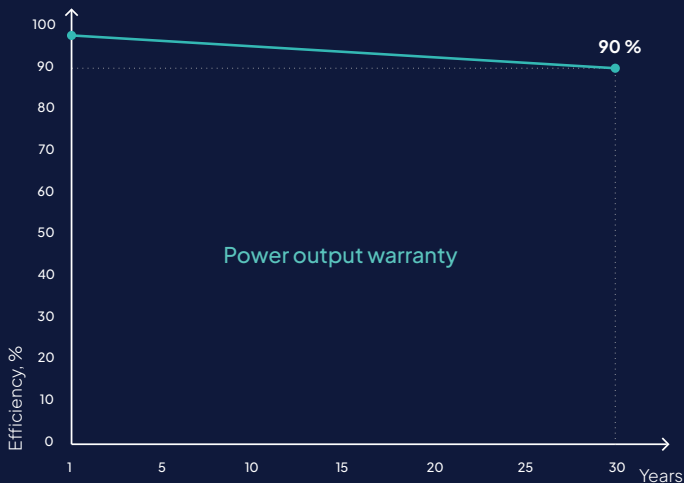

Temperature ratings	
Current temperature coefficient ( $\alpha$ )	+0.045% / °C
Voltage temperature coefficient ( $\beta$ )	-0.250% / °C
Power temperature coefficient ( $\delta$ )	-0.300% / °C
Nominal operating module temperature	46 °C

Mechanical data	
Dimensions (LxWxH) (mm)	1729x1140x7,1 mm
Dimensions with edge sealing (LxWxH) (mm)	1737±5x1148±5x7,1
Weight (kg)	32
Front glass (mm)	3,2 with AR coating
Back glass (mm)	3,2, black
Cell Size (mm)	182x91,875
Busbars	10
Cell configuration	6x18
Frame	Frameless
Rated operating altitude	Up to 2000 m
Operating temperature (°C)	-40 ÷ +85
Maximum test load (wind/snow) (Pa)	5400/10500
Junction box / IP class	Split junction box / IP68
Cable cross section size (mm <sup>2</sup> )	4
Cable length	1,2 m
Bypass diodes	3
Connector	MC4-EVO2

Packing information	
Modules per pallet	25 pcs
Dimensions of a pallet (LxWxH)	1815x1205x1070 mm
Weight of a pallet (gross)	868 kg
Pallets per 13,6 m truck	28 pcs
Modules per 13,6 m truck	700 pcs

Certifications	
IEC 61215:2021; IEC 61730:2016	
Cradle to Cradle (C2C)	Gold level
abZ/aBG	Overhead Glazing
IEC 62716:2013	Ammonia corrosion testing
IEC 61701:2020	Salt mist corrosion testing
IEC 61215-2:2021	39mm hailstone - Hail resistance class 4 (HW4)
ISO 9001:2015	Quality management systems
ISO 14001:2015	Environmental management systems
ISO 45001:2018	Occupational health and safety
SundaHus	A level assessment
Produced using 100% renewable energy	
Membership at Svensk Solenergi	



This datasheet is not legally binding. The manufacturer reserves the right to make changes to product specifications and / or product features without prior notice. The most recent versions of all documents (T&C's, datasheets, warranties and installation manuals) can always be found on our website at [www.solitek.eu](http://www.solitek.eu)

