

SoliTek is a European manufacturer of top quality PV cells and modules with headquarters and production plant in Vilnius, Lithuania.

The company combines the most sophisticated technologies and 20 years of experience.



20

years product
guarantee

25

80% max
output guarantee

S032020-1



PID free



PRODUCED USING 100%
RENEWABLE ENERGY

SoliTek Standard M.60-B-325

Standard all black monocrystalline 60 cell module

Working conditions	
Maximum system voltage	DC 1000 V (TUV)
Operating temperature	-40°C / +85°C
Maximum reverse current	15 A
Maximum wind /snow load	1600/3600Pa**
IP protection level	67
Safety class	II


**Safety factor 1,5

Temperature coefficients	
Current temperature coefficient (α)	+0,060% /° C
Voltage temperature coefficient (β)	-0,347% /° C
Power temperature coefficient (δ)	-0,40% /° C
Nominal Operating Module Temperature	45±2°C

Electrical parametres		Unit	Value
Parameter			
Maximum power*	Pmax	W	325
Maximum power point voltage	Vmpp	V	33,29
Maximum power current	Impp	A	9,78
Open circuit voltage	Voc	V	41,11
Short circuit current	Isc	A	10,05
Efficiency	η	%	19,42

*Under Standard Test Conditions (STC) of irradiance of 1000W/sq. m., spectrum AM 1.5 and cell temperature of

Mechanical data	
Cell size	158,75x158,75
Number of cells	60 (6x10)
Front side glass	3,15
Weight	20 kg
Dimensions (L x W x H)	1665x1005x35
J-box	IP67, ventilated
Cable length	1 m
Cable cross section size	4 mm~
Number of diodes	3
Plug-in connection	MC4
Frame	Black anodised Aluminim frame
Packing configuration	30 pallets(dimensions 171x105x126 cm)

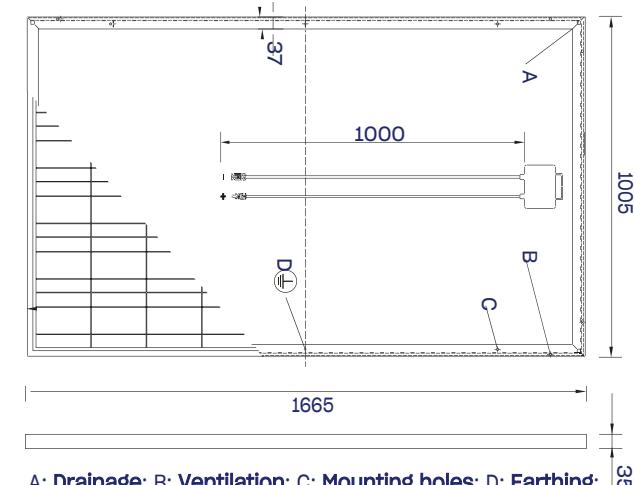

A: Drainage; B: Ventilation; C: Mounting holes; D: Earthing;

The module is manufactured by SoliTek cells, UAB.

Certificates and memberships



Mokslininku str. 6A,
Vilnius 08412, Lithuania
Tel. +370 5 263 8774
info@solitek.eu
www.solitek.eu